
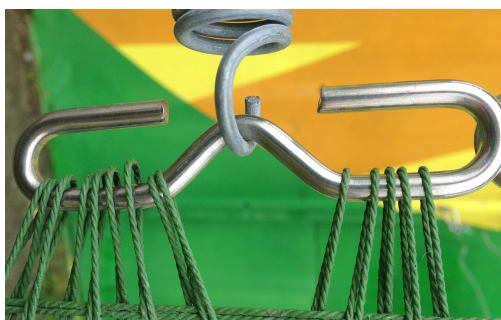


CONGRATULATIONS ON PURCHASING A MR TRAMPOLINE PERFORMANCE 2 STRING MAT

When you first open this mat, take care to unfold the mat slowly. Some of the hanger clips may have come loose during transit or may have caught on other parts of the mat, it is important to ensure all of the hanger clips are evenly connected to the edge of the double string mat.

- Photo 1.** Shows 14 loops attached to the hanger clip, 7 loops either side of the middle “spring lump”, your mat should have 6 or 7 loops per side **NO LESS**.
- Photo 2.** Shows 5 loops on one half and 9 loops on the other half, in this case detach the spring slide 2 loops across & reattach the spring.
- Photo 3.** Shows a loose loop, this has been missed in production, disconnect the spring, reattach the loop in sequence, then reattach the spring. In short, if every loop is attached to a hanger clip and there are no less than 6 loops on any half, then you are in good shape!

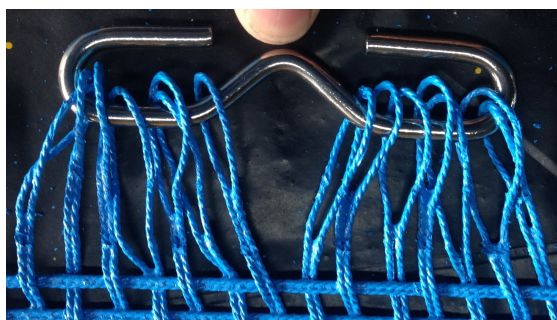

Please note, Mr Trampoline double string woven mats are all hand woven, the number of strings can vary from mat to mat so you will not have an exact number of loops. Be sure to have 6 or 7 loops minimum per side on each hanger clip.

CARE OF YOUR MR TRAMPOLINE MAT

Any broken strings should be re-joined or tied as soon as they are noticed. Simply use some of the white string included with your original delivery or call Mr Trampoline and we can send you some. A simple reef knot or fisherman’s knot will join the string to the new piece, follow the weave to a point where it is practical to join the other end of the broken string.

Your performance mat should be re-coated with rubber mat paint every 3 years to ensure all weather life protection. (How often you paint depends on wear) *

Commercial applications are recommended to paint their mat every 12 months. Every 2nd coat (6 years) we recommend painting the mat, then unclipping it from the springs & turning it over to make sure it gets even UV exposure.

INSTRUCTIONS FOR RE-COATING MAT

The rubber mat paint should be stirred thoroughly and applied with a foam disposable roller.

Do not use a paint brush. Rubber mat paint is available from Mr Trampoline.

Firstly, touch up any worn areas with roller (usually centre of mat). When touch dry (approx. 15 mins), re-apply rubber paint to top side of mat followed by the underside of the mat.

This may be done on above ground (free standing) trampolines by standing the trampoline on its side. For inground (pit) trampolines, either paint underside from inside the pit or wait for top side to dry and turn mat over.

HOW TO MARK CROSS IN CENTRE OF MAT

Cut out template of the cross (approx 40cm) from heavy cardboard. Find centre of mat & position cardboard template. Paint with spray can (you can purchase spray paint from any hardware store or use any domestic household paint from the shed!)

* Our mats are very tough, so shoes on or off will not damage the mat, however if you have high usage with shoes on, then the paint may wear sooner & protective coats may be needed more often, say every 2 years instead of every 3.

DO NOT USE TRAMPOLINE FOR AT LEAST 24 HOURS AFTER RE-COATING MAT

**Mr Trampoline
ABN 34 092 595 527
972 Dandenong Rd, CARNEGIE, VIC, 3163
(03) 9571 5711**

STEP BY STEP – RE-TYING STRINGS

Excessive stress, sharp objects or storing items on the trampoline can damage the strings. Any time you notice a broken string it should be re-joined or re-tied immediately. Simply use some of the white string included in your original delivery or call Mr Trampoline and we will send you spare string.

Step 1

Identify how many strings are broken or damaged.

Step 2

Unthread the string either side of the “break” to allow yourself enough string to tie a knot - about 78cm will be enough. Pull the strings apart to tie them separately.

Step 3

Use a simple reef knot or fisherman’s knot to join the string at one end of the “break”. (refer page 22 for reef knot instructions). Typical maintenance requires you to turn your mat over every few years, therefore it is not important to tie the knot on top or under the mat. Leave the “tail” long.

Step 4

Follow the weave pattern to a point where it is practical to join the other end of the broken string and tie another reef knot. A fat needle can assist to get this knot tight. It is important to stretch the newly woven section as tight as possible.

Step 5

After re-tying the string, we recommend you apply a protective coat of paint to the area. Small 250ml tins can be purchased from Mr Trampoline. Dab the paint liberally over the new string and the knotted area. Be sure to coat the top and the bottom side to protect the string from UV exposure.


Step 6

Once the paint has dried, poke the “tail” of each knot under the mat.

TIP: When you turn your mat over in future, poke the “tails” through to the underside again. This should stop the end of the “tail” fraying.

Double Sheet Bend

This knot is like the sheet bend except for it has an extra turn. Used for tying two ropes of unequal thickness together.

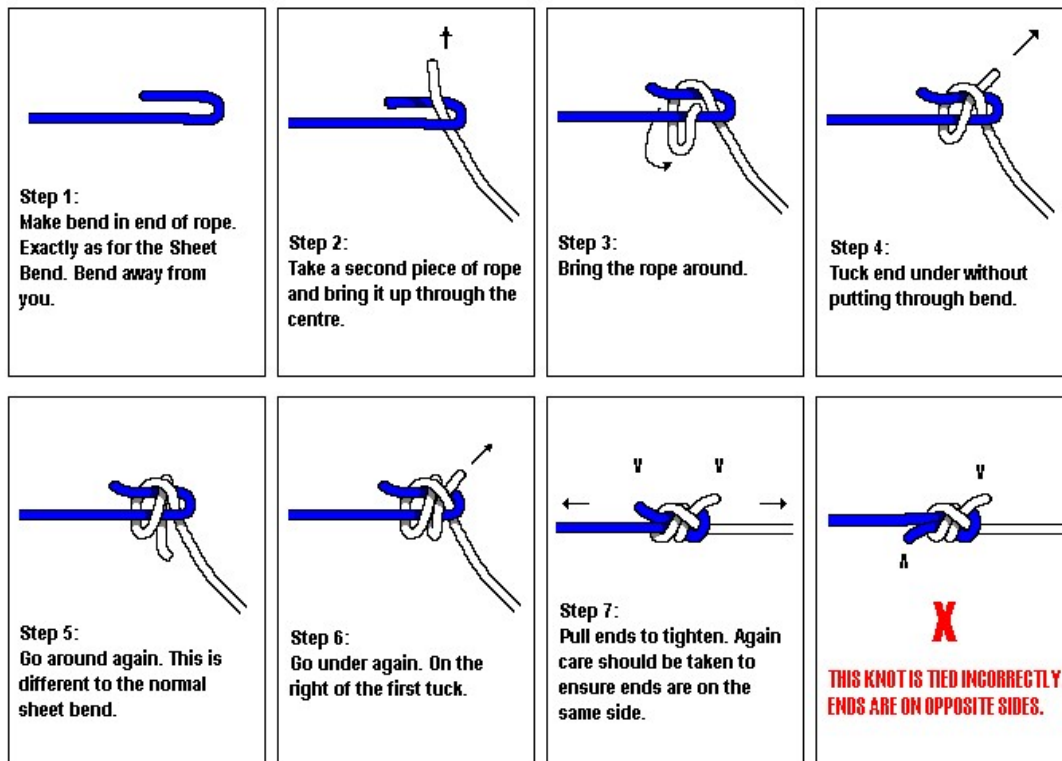

SQUARE KNOT

